EE 434 Fall 2005

Analog and Digital VLSI Design

Lecture Instructor: Randy Geiger

351 Durham

rlgeiger@iastate.edu 294-7745

Lab Instructor: Saqib Malik

Catalog Description

E E 434. Analog and Digital VLSI Design Semiconductor processes and fabrication, device models, physical layout, simulation, synthesis and fabrication. Design and use of analog and digital building blocks. Behavioral level descriptions of digital circuits and synthesis using standard cells.

Topical Coverage

- Semiconductor Processes
- Device Models (MOS and BJT)
- Layout
- Simulation and Verification
- Basic Digital Building Blocks
- Behavioral Design and Synthesis
 - Standard cells
- Basic Analog Building Blocks

Grading Policy

2 Exams 100 pts each

1 Final 100 pts.

Homework 100 pts.total

Quizzes 15 pts each

Lab and Lab Reports 100 pts.total

Design Project 100 pts.

If for any reason the final examination is waived, the two listed examinations will be weighted 150 points each.

Cell Phone Policy





Use them!

Hearing them ring represents business opportunity!

Please step outside of the room to carry on your conversations

The Semiconductor Industry

How big is it?

How does it compare to other industries?

How big is the semiconductor industry?

http://news.designtechnica.com/news_printerfriendly8013.html

Worldwide Semiconductor Sales Up 6.5 Pct

Monday, August 1st 2005 @ 6:45 PM PDT

The Semiconductor Industry Association reports worldwide semiconductor sales rose 6.5 percent during the first half of 2005 compared to 2004.

The Semiconductor Industry Association announced today that sales of semiconductors worldwide were up by 6.5 percent in the first half of 2005 five compared to the first half of 2004, accounting for a total of \$109 billion in total sales. Although sales declined slightly in June 2005 compared to May 2005, June sales were still nearly 1 percent higher than sales in June 2004, accounting for over \$18 billion around the world.

Although the second quarter of 2005 was 2.1 percent weaker than the first, most industry segments saw sales above expectations for the second quarter of 2005, including wired and wireless communications, automotive applications, and personal computers. The SIA expects sales worldwide to reach a total of \$226 billion as markets enter the historically strong third quarter of the year, which includes back-to-school purchases and presages the holiday season. The SIA also notes the semiconductor manufacturing capacity increased in the second quarter of 2005 after two sequential quarters of decline, indicating makers are increasing output in the third quarter to match utilization rates in industry.

How big is the semiconductor industry?

1984	\$25B
1990	\$50B
1994	\$100B
2004	\$200B
2005	\$226B (est)

At the current growth rate, it will top \$300B before the end of this decade!


Semiconductor sales do not include the sales of the electronic systems in which they are installed and this marked is much bigger !!

The Semiconductor Industry

How big is it?

How does it compare to other industries?

- Relative to Iowa-Centric Commodities
- Relative to Oil Production

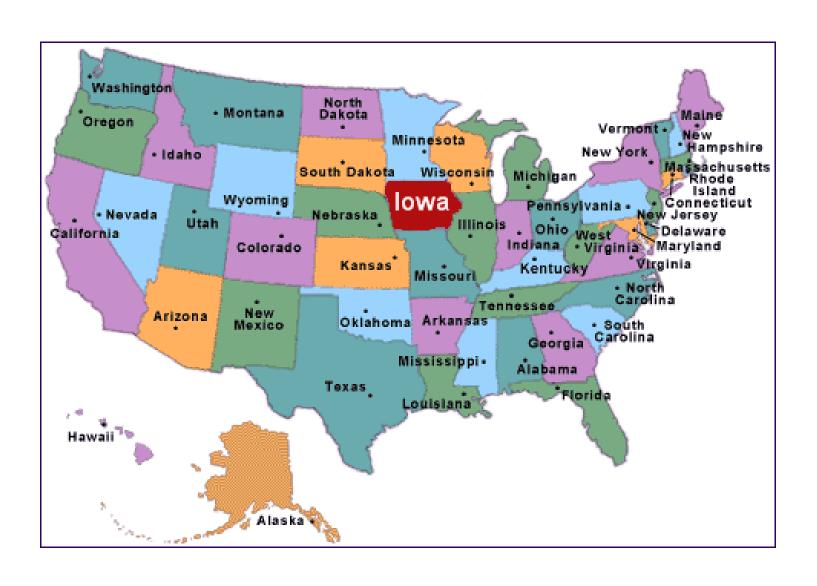

In the United States, Iowa ranks:

First in Corn production
First in Soybean production
First in Egg production
First in Hog production
Second in Red Meat production


http://www.iowalifechanging.com/travel/iowafacts/statistics.html



Corn




Beans

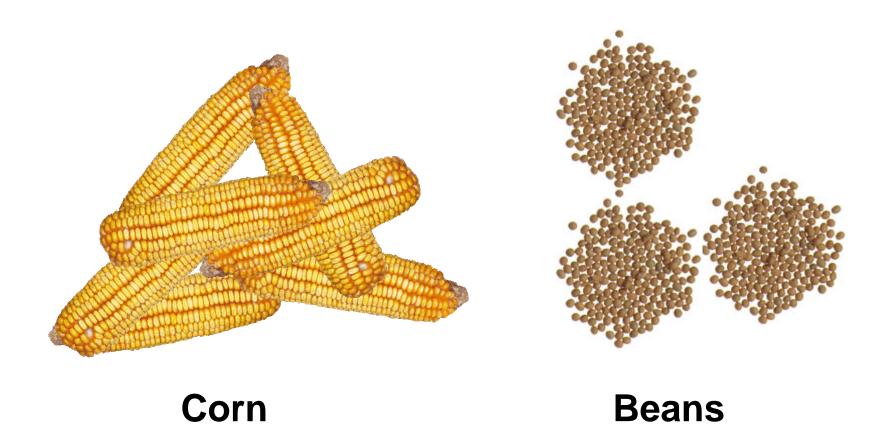

Agricultural Commodities are a Major Part of the Iowa Economy

Value of Agricultural Commodoties

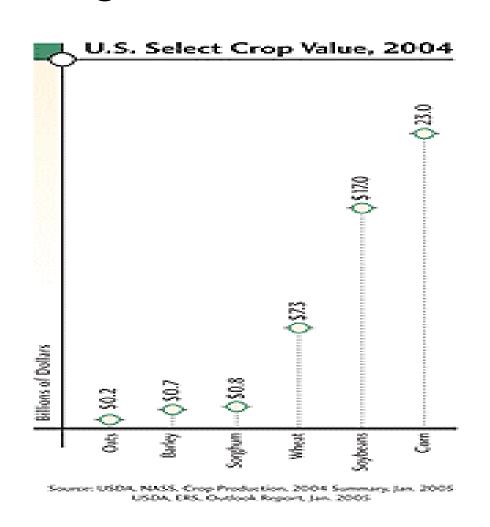

Corn and Beans Dominate the US Agricultural Comodoties

Value of Agricultural Commodities

Corn Production

Soybean Production

	Bushels (Billions)
Iowa	2.24
United States	11.8
World	23.3

	Bushels (Millions)
Iowa	338
United States	3,141
World	7,968



Updated: 08/22/2005 06:54:53

Cash Corn Bids

DELIVERY PERIOD	AUG 2005	SEPT 2005	O/N 2005	DEC 2005	JAN 2006	MAR 2006	JUL 2006
BOONE	1.62	1.65	1.71	1.79	1.89	1.98	2.04
	1.00	1.00	1.00	1.00	1.04	1.01	4.54

Cash Soybean Bids

DELIVERY PERIOD	AUG 2005	SEPT 2005	O/N 2005	DEC 2005	JAN 2006	MAR 2006	JULY 2006
BOONE	5.75	5.74 0.06	5.69 0.06	5.77	5.81	5.87 0.02	5.82

Value of Agricultural Commodities

Corn Production

Soybean Production

	Bushels (Billions)	Value (Billion Dollars)
Iowa	2.24	\$3.63
United States	11.8	\$19.1
World	23.3	\$37.7

	Bushels (Millions)	Value (Billion Dollars)
Iowa	338	\$1.94
United States	3,141	\$18.1
World	7,968	\$45.8

World 2004 semiconductor sales of \$200B over a factor of 2 larger than total corn and soybean production!

The Semiconductor Industry

How big is it?

How does it compare to other industries?

- Relative to Iowa-Centric Commodities
- Relative to Oil Production

Value of Oil

	Barrels/Day (Million)
United States	20
Western Europe	15
Japan	5.6
China	5.5
Russia	2.7
World	80

Value of Oil

	Barrels/Year (Billion)	Value (Billion Dollars)	Value (Billion Dollars)
		(@\$20/barrel)	(@\$50/barrel)
United States	7.3	\$146	\$365
Western Europe	5.5	\$110	\$275
Japan	2.0	\$40	\$100
China	2.0	\$40	\$100
Russia	0.99	\$19.8	\$49.5
World	29.2	\$584	\$1460

World 2004 semiconductor sales of \$200B a factor of 2.5 to 7 smaller than total oil production!

Electronic system sales much larger than semiconductor sales!!

The Semiconductor Industry

How big is it?

About \$225B/Year and growing rapidly

How does it compare to other industries?

Relative to Iowa-Centric Commodities
 Much larger than major agricultural commodities

Relative to Oil Production

Factor of 2 to 4 smaller than energy

The semiconductor industry is one of the largest sectors in the world economy and is rapidly growing

How is the semiconductor industry distributed around the world?

2004 Worldwide Top 50 Semiconductor Sales Leaders - 6/16/2005 - Pur...

http://www.purchasing.com/article/CA609239.html



2004 Worldwide Top 50 Semiconductor Sales Leaders

By James Carbone

Purchasing June 16, 2005

2004 Worldwide Top 50 Semiconductor Sales Leaders

2004 Rank	2003 Rank	Company	Headquarters	2003 (\$M)	2004 (\$M)	04/03 % change
1	1	Intel	U.S.	27,030	30,900	14%
2	2	Samsung	South Korea	10,400	15,830	52%
3	3	TI	U.S.	8,250	10,700	30%
4	7	Infineon	Europe	7,109	9,180	29%
5	4	Renesas	Japan	7,970	9,000	13%
6	6	ST	Europe	7,238	8,760	21%
7	5	Toshiba	Japan	7,355	8,531	16%
8	8	TSMC*	Taiwan	5,855	7,648	31%
9	9	NEC	Japan	5,603	6,469	15%
10	11	Philips	Europe	4,512	5,692	26%
11	10	Freescale	U.S.	4,654	5,519	19%
12	13	Sony	Japan	3,933	5,070	29%

13	12	AMD/Spansion	U.S.	3,940	5,001	27%
14	15	Micron	U.S.	3,575	4,652	30%
15	20	Hynix	South Korea	2,516	4,648	85%
16	14	Matsushita	Japan	3,675	4,265	16%
17	19	UMC*	Taiwan	2,740	3,900	42%
18	18	Fujitsu	Japan	2,955	3,440	16%
19	17	Sharp	Japan	3,035	3,355	11%
20	22	Qualcomm**	U.S.	2,466	3,224	31%
21	16	IBM	U.S.	3,115	3,150	1%
22	21	Rohm	Japan	2,490	2,818	13%
23	24	Analog Devices	U.S.	2,100	2,570	22%
24	28	Broadcom**	U.S.	1,610	2,401	49%
25	23	Sanyo	Japan	2,245	2,150	-4%
26	29	National	U.S.	1,560	2,048	31%
27	27	Agilent	U.S.	1,635	2,011	23%
28	26	Nvidia**	U.S.	1,820	1,975	9%
29	25	Agere	U.S.	1,920	1,807	-6%
30	38	ATI**	Canada	1,135	1,725	52%

31	30	Oki	Japan	1,360	1,720	26%
32	56	Powerchip	Taiwan	666	1,716	158%
33	50	Elpida	Japan	760	1,700	124%
34	35	Maxim	U.S.	1,229	1,662	35%
35	31	Atmel	U.S.	1,331	1,653	24%
36	42	Sandisk**	U.S.	982	1,603	63%
37	32	Xilinx**	U.S.	1,304	1,585	22%
38	33	Fairchild	U.S.	1,273	1,458	15%
39	37	Seiko Epson	Japan	1,150	1,325	15%
40	52	ProMOS	Taiwan	729	1,283	76%
41	40	ON Semi	U.S.	1,065	1,263	19%
42	34	LSI Logic	U.S.	1,270	1,248	-2%
43	48	Nanya	Taiwan	825	1,211	47%
44	36	Mitsubishi	Japan	1,155	1,210	5%
45	49	Marvell**	U.S.	780	1,190	53%
46	41	IR	U.S.	1,050	1,185	13%
47	39	MediaTek**	Taiwan	1,104	1,172	6%
48	53	Chartered*	Singapore	728	1,103	52%
49	45	MagnaChip***	South Korea	831	1,085	31%
50	47	Altera**	U.S.	827	1,016	23%
	Top 10	Total		91,322	112,710	23%
	Top 25	Total		136,371	168,873	24%
	Top 50	Total		164,860	205,827	25%

^{*}Foundry
**Fabless
***Includes total from Hynix in '03 & '04

Selected Semiconductor Trends

- Microprocessors
- DRAMS
- FPGA

Press Room Home	
Press Releases	
Press Resources	
Corporate Information	
Press Room Site Index	
Contact Intel PR	
Search Press Room	$\overline{}$

Microprocessor Quick Reference Guide

	-
_	
	and and an A
	print

Learn all the significant processor evolution facts, including introduction date, ratings and number of transistors. Click on the processor family below to view facts on each processor in that family, or scroll down the page to see them all. For a fun and informative overview of Intel processor history, visit the interactive History of the Microprocessor.

Intel® Pentium® M Processor

Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Cache	Bus Speed	Core Voltage	Thermal Design Power (TDP)	Typical Use
Intel® Pentium® M Processor 770 780 750 740 730	2.13 GHz 2 GHz 1.86 GHz 1.73 GHz 1.60 GHz	Jan. 19, 2005 770 760 750 740 730	90 nm 140 million	2 MB L2 cache	533 MHz	1.260-1.3 72 V Max Perf. Mode 0.988V Battery Optimized Mode	27 W	Full-size and thin & light mobile PCs
Intel® Pentium® M Processor 765 755 745 735 725 715	2.10 GHz 2 GHz 1.80 GHz 1.70 GHz 1.60 GHz 1.50 GHz	Oct. 20, 2004 765 June 23, 2004 725 715 May 10, 2004 755 745 735	90 nm 140 million	2 MB L2 cache	400 MHz	1.276-1.340V Max Perf. Mode 0.988V Battery Optimized Mode	21 W	Full-size and thin & light mobile PCs
Intel® Pentium® M Processor	1.70 GHz 1.60 GHz 1.50 GHz 1.40 GHz 1.30 GHz	June 2, 2003 1.70 GHz Mar. 12, 2003 1.60 GHz 1.50 GHz 1.40 GHz 1.30 GHz	0.13-micron 77 million	1 MB L2 cache	400 MHz	1.484V in Max. Perf. Mode 0.956V Battery Optimized Mode (1.40-1.70 GHz) 1.39V in Max Perf. Mode 0.96V in Battery Optimized Mode (1.30 GHz)	24.5 W	Full-size and thin & light mobile PCs

Intel® Itanium® Processor Family

Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Cache	Typical Use
Intel® Itanium® 2 Processor	1.60 GHz	Nov.8, 2004	0.13 micron 592 million	9 MB L3 Cache	Demanding enterprise-class servers and high-performance applications
Intel® Itanium® 2 Processor	1.60 GHz	Nov.8, 2004	0.13 micron 592 million	6 MB L3 Cache	Demanding enterprise-class servers and high-performance applications
Intel® Itanium® 2 Processor	1.50 GHz	Nov.8, 2004	0.13 micron 592 million	4 MB L3 Cache	Demanding enterprise-class servers and high-performance applications
Intel® Itanium® 2 Processor	1.60 GHz	Nov.8, 2004	0.13 micron 592 million	3 MB L3 Cache	For dual processor servers
Intel® Itanium® 2 Processor	1.60 GHz 1.40 GHz	April 14, 2004	0.13-micron 410 million	3 MB L3 Cache	Technical computing clusters and entry-level, front-end enterprise systems
Intel® Itanium® 2 Processor (for dual processor systems)	1.40 GHz	Sept. 8, 2003	0.13-micron 410 million	1.5 MB L3 Cache	Dual processor servers
Intel® Itanium® 2 Processor	1.50 GHz	June 30, 2003	0.13-micron 410 million	6 MB L3 Cache	Demanding enterprise-class servers, and high-performance applications
Intel® Itanium® 2 Processor	1 GHz 900 MHz	July 8, 2002	0.18-micron 220 million	3 MB and 1.5 MB L3 Cache	Demanding enterprise-class servers, and high-performance applications
Intel® Itanium® Processor	800 MHz 733 MHz	May 2001	0.18-micron 25 million	2 MB and 4 MB L3 Cache	Demanding enterprise-class servers, and high-performance applications

Intel® Pentium® 4 Processor

Desktop

Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Cache	Bus Speed	Typical Use
Intel® Pentium® 4 Processor Extreme Edition supporting HT Technology	3.73 GHz	Feb. 21, 2005	90nm 169 million	2 MB L2 cache	1066 MHz	Gaming and Computing Enthusiasts
Intel® Pentium® 4 Processor Extreme Edition supporting HT Technology	3.46 GHz	Nov. 15, 2004	0.13-micron 178 million	2 MB L3 cache; 512 KB L2 cache	1066 MHz	Gaming and Computing Enthusiasts
Intel® Pentium® 4 Processor Extreme Edition supporting HT Technology	3.40 GHz 3.20 GHz	June 21, 2004 3.40 GHz (Intel® LGA775 package technology) Feb. 2, 2004 3.40 GHz Nov. 3, 2003 3.20 GHz	0.13-micron 178 million	2 MB L3 cache; 512 KB L2 cache	800 MHz	Gaming and Computing Enthusiasts
Intel® Pentium® 4 Processor supporting HT Technology 660 650 640 630	3.60 GHz 3.40 GHz 3.20 GHz 3 GHz	Feb. 21, 2005 660 650 640 630	90nm 169 million	2 MB L2 cache	800 MHz	Desktops and entry-level workstations
Intel® Pentium® 4 Processor supporting HT Technology 570 560 550 540 530	3.80 GHz 3.60 GHz 3.40 GHz 3.20 GHz 3 GHz 2.80 GHz	Nov. 15, 2004 570 June 21, 2004 560 550 540 530 520	90nm 125 million	1 MB L2 cache	800 MHz	Desktops and entry-level workstations

Intel® Pentium® 4 Processor supporting HT Technology	3.40 GHz 3.20E GHz 3E GHz 2.80E GHz	Feb. 2, 2004	90nm 125 million	1 MB L2 cache	800 MHz	Desktops and entry-level workstations
Intel® Pentium® 4 Processor supporting HT Technology	3.40 GHz 3.20 GHz 2.80C GHz 2.60C GHz 2.40C GHz		0.13-micron 55 million	512 KB Advanced Transfer L2 cache	800 MHz	Desktops and entry-level workstations
Intel® Pentium® 4 Processor supporting HT Technology	3 GHz	Apr. 14, 2003	0.13-micron 55 million	512 KB Advanced Transfer L2 cache	800 MHz	Desktops and entry-level workstations
Intel® Pentium® 4 Processor supporting HT Technology	3.06 GHz	Nov. 14, 2002	0.13-micron 55 million	512 KB Advanced Transfer L2 cache	533 MHz	Desktops and entry-level workstations
Intel® Pentium® 4 Processor	2.80 GHz 2.66 GHz 2.53 GHz 2.40 GHz 2.26 GHz	Aug. 26, 2002 2.80 GHz 2.66 GHz May 6, 2002 2.53 GHz 2.40 GHz 2.26 GHz	0.13-micron 55 million	512 KB Advanced Transfer L2 cache	533 MHz	Desktops and entry-level workstations
Intel® Pentium® 4 Processor	2.60 GHz 2.50 GHz 2.40 GHz 2.20 GHz 2 GHz	Aug. 26, 2002 2.60 GHz 2.50 GHz Apr. 2, 2002 2.40 GHz Jan. 7, 2002	0.13-micron 55 million	512 KB Advanced Transfer L2 cache	400 MHz	Desktops and entry-le∨el workstations
		2.2 GHz	1			171
		Aug. 27, 2001 2 GHz				
Intel® Pentium® 4 Processor	2 GHz 1.90 GHz 1.80 GHz 1.70 GHz 1.60 GHz 1.50 GHz 1.40 GHz	Aug. 27, 2001 2 GHz 1.90 GHz Jul. 2, 2001 1.80 GHz 1.60 GHz Apr. 23, 2001 1.70 GHz Nov. 20, 2000 1.50 GHz 1.40 GHz	0.18-micron 42 million	256 KB Advanced Transfer L2 cache	400 MHz	Desktops and entry-level workstations

Intel® Celeron® Processor

Desktop	Negas a	Tes 1228 No. 10		1 0 0	1828	Tone is one
Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Cache	Bus Speed	Typical Use
Intel® Celeron® D Processor 345 340 335 330 325 320	3.06 GHz 2.93 GHz 2.80 GHz 2.66 GHz 2.53 GHz 2.40 GHz 2.26 GHz	Nov. 23, 2004 345 Sep. 22, 2004 340 June 24, 2004 335 330 325 320	90 nm	256 KB L2 cache	533 MHz	Value and Mobile PCs
Intel® Celeron® Processor	2.80 GHz 2.70 GHz	Nov. 5, 2003 2.80 GHz Sept. 24, 2003 2.70 GHz	0.13-micron	128 KB L2 cache	400 MHz	Value and Mobile PCs
Intel® Celeron® Processor	2.40 GHz 2.30 GHz 2.20 GHz 2.10 GHz	Mar. 31, 2003 2.40 GHz 2.30 GHz Nov. 20, 2002 2.20 GHz 2.10 GHz	0.13-micron	128 KB L2 cache	400 MHz	Value PCs
Intel® Celeron® Processor	2 GHz	Sept. 18, 2002	0.13-micron	128 KB L2 cache	400 MHz	Value PCs
Intel® Celeron® Processor	1.80 GHz 1.70 GHz	June 12, 2002 1.80 GHz May 15, 2002 1.70 GHz	0.18-micron	128 KB L2 cache	400 MHz	Value PCs
Intel® Celeron® Processor	1.40 GHz 1.30 GHz 1.20 GHz	May 15, 2002 1.40 GHz Jan. 3, 2002 1.30 GHz Oct. 2, 2001 1.20 GHz	0.13-micron	256 KB L2 cache	100 MHz	Value PCs

Intel® Celeron® Processor	1.10 GHz 1 GHz 950 MHz 990 MHz 850 MHz 800 MHz	Aug. 31, 2001 1.10 GHz 1 GHz 950 MHz Jul. 2, 2001 900 MHz May 21, 2001 850 MHz Jan. 3, 2001 800 MHz	0.18-micron	128 KB L2 cache	100 MHz	Value PCs
Intel® Celeron® Processor	766 MHz 733 MHz 700 MHz 667 MHz 633 MHz 600 MHz 566 MHz	Nov. 13, 2000 766 MHz 733 MHz June 26, 2000 700 MHz 667 MHz 633 MHz March 29, 2000 600 MHz 566 MHz	0.18-micron	128 KB L2 cache	66 MHz	Value PCs
Intel® Celeron® Processor	533 MHz 500 MHz 466 MHz 433 MHz 400 MHz 366 MHz 333 MHz 300 MHz	Jan. 4, 2000 533 MHz Aug. 2, 1999 500 MHz Apr. 26, 1999 466 MHz Mar. 22, 1999 433 MHz Jan. 4, 1999 400 MHz 366 MHz Aug. 24, 1998 333 MHz Aug. 24, 1998 300A MHz	0.25-micron 19 million	128 KB L2 cache	66 MHz	Value PCs
Intel® Celeron® Processor	300 MHz 266 MHz	June 8, 1998 300 MHz Apr. 15, 1998 266 MHz	0.25-micron 7.5 million	NA	66 MHz	Value PCs

Intel® Pentium® III Processor

Desktop						
Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Cache	Bus Speed	Typical Use
Intel® Pentium® III Processor	1 GHz 933 MHz 866 MHz 850 MHz	Mar. 8, 2000 1 GHz Mar. 20, 2000 866 MHz 850 MHz May 24, 2000 933 MHz	0.18-micron 28 million	256 KB Advanced Transfer cache	100 MHz 133 MHz	Business, consumer PCs 1- and 2-way servers and workstations
Intel® Pentium® III Processor	733 MHz 700 MHz 667 MHz 650 MHz 600 MHz 550 MHz 533 MHz 500 MHz	Oct. 25, 1999	0.18-micron 28 million	256 KB Advanced Transfer cache	100 MHz 133 MHz	Business, consumer PCs 1- and 2-way servers and workstations
Intel® Pentium® III Processor	600 MHz 550 MHz 500 MHz 450 MHz	Aug. 2, 1999 600 MHz May 17, 1999 550 MHz	0.25-micron 9.5 million	512 KB	100 MHz	Business, consumer PCs; 1- and 2-way servers and workstations
		Feb. 26, 1999 500 MHz 450 Mhz				

Intel® Pentium® III Xeon™ Processor

Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Cache	Addressable Memory	Bus Speed	Typical Use
Intel® Pentium® III Xeon™ Processor	900 MHz	Mar. 21, 2001	0.18-micron 28 million	2 MB Advanced Transfer L2 cache	64 GB	100 MHz	High-end servers, 4- and 8-way multiprocessing systems
Intel® Pentium® III Xeon™ Processor	933 MHz	May 24, 2000	0.18-micron 28 million	256 KB Advanced Transfer L2 cache	64 GB	133 MHz	Business and consumer PCs, 1- and 2-way servers and workstations
Intel® Pentium® III Xeon™ Processor	700 MHz	May 22, 2000	0.18-micron 28 million	1 MB and 2 MB Advanced Transfer L2 cache	64 GB	100 MHz	4- and 8-way servers
Intel® Pentium® III Xeon™ Processor	866 MHz 800 MHz 733 MHz 667 MHz 600 MHz	Apr. 10, 2000 866 MHz Jan. 12, 2000 800 MHz Oct. 25, 1999 733 MHz 667 MHz 600 MHz	0.18-micron 28 million	256 KB Advanced Transfer L2 cache	64 GB	133 MHz	2-way servers and workstations
Intel® Pentium® III Xeon™ Processor	550 MHz 500 MHz	Mar. 17, 1999	0.25-micron 9.5 million	512 KB, 1 MB and 2 MB Advanced Transfer L2 cache	64 GB	100 MHz	Business PCs, 2-, 4- and 8-way (and higher) servers and workstations

Intel® Pentium® II Xeon™ Processor

Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Cache	Addressable Memory	Bus Speed	Typical Use
Intel® Pentium® II Xeon™ Processor	450 MHz	Jan. 5, 1999	0.25-micron 7.5 million	512 KB 1 MB 2 MB	64 GB	100 MHz	4-way servers and workstations
Intel® Pentium® II Xeon™ Processor	450 MHz	Oct. 6, 1998	0.25-micron 7.5 million	512 KB	64 GB	100 MHz	Dual-processor servers and workstations
Intel® Pentium® II Xeon™ Processor	400 MHz	June 29, 1998	0.25-micron 7.5 million	512 KB 1 MB	64 GB	100 MHz	Midrange and higher servers and workstations

Intel® Pentium® II Processor

Desktop						
Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Cache	Bus Speed	Typical Use
Intel® Pentium® II Processor	450 MHz	Aug. 24, 1998	0.25-micron 7.5 million	512 KB	100 MHz	Business and consumer PCs; 1- and 2-way servers and workstations.
Intel® Pentium® II Processor	400 MHz 350 MHz	Apr. 15, 1998	0.25-micron 7.5 million	512 KB	100 MHz	Business and consumer PCs; 1- and 2-way servers and workstations.
Intel® Pentium® II Processor	333 MHz	Jan. 26, 1998	0.25-micron 7.5 million	512 KB	66 MHz	Business and consumer PCs; 1- and 2-way servers and workstations.
Intel® Pentium® II Processor	300 MHz 266 MHz 233 MHz	May 7, 1997	0.35-micron 7.5 million	512 KB		High-end business desktops, workstations and servers.

Intel® Pentium® Processor Family

Desktop						
Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Typical Use		
Intel® Pentium® Processor with MMX™ Technology	233 MHz	June 2, 1997	0.35-micron 4.5 million	High-performance desktops and servers		
Intel® Pentium® Processor with MMX™ Technology	200 MHz 166 MHz	Oct. xx, 1996	0.35-micron 4.5 million	High-performance desktops and servers		
Intel® Pentium® Processor	200 MHz	June 10, 1996	0.35-micron 3.3 million	High-performance desktops and servers		

Intel® Pentium® Processor	166 MHz 150 MHz	Jan. 4, 1996	0.35-micron 3.3 million	High-performance desktops and servers
Intel® Pentium® Processor	133 MHz	June 1995	0.35-micron 3.3 million	High-performance desktops and servers
Intel® Pentium® Processor	120 MHz	Mar. 27, 1995	0.6-micron 0.35-micron 3.3 million	Desktops and notebooks
Intel® Pentium® Processor	100 MHz 90 MHz	Mar. 7, 1994	0.6-micron 3.3 million	Desktops
Intel® Pentium® Processor	75 MHz	Oct. 10, 1994	0.6-micron 3.3 million	Desktops and notebooks
Intel® Pentium® Processor	66 MHz 60 MHz	Mar. 22, 1993	0.8-micron 3.1 million	Desktops

Intel486™ Processors and Earlier

Processor	Clock Speed(s)	Intro Date(s)	Mfg. Process/ Transistors	Transistors	Addressable Memory	Typical Use
Intel486™ SL Processor	33 MHz 25 MHz 20 MHz	Nov. 9, 1992	0.8-micron	1.4 million	64 MB	First CPU specifically designed for Notebook PCs
InteIDX4™ Processor	100 MHz 75 MHz	Mar. 7, 1994	0.6-micron	1.6 million	4 GB	High-performance, entry-level desktops and value notebooks
InteIDX2™ Processor	66 MHz 50 MHz 40 MHz	Aug. 10, 1992 66 Mhz Mar. 3, 1992 50 Mhz June 1993 40MHz	0.8-micron	1.2 million	4 GB	High-performance, low-cost desktops
Intel486™ SX Processor	33 MHz 25 MHz 20 MHz 16 MHz	Sept. 21, 1992 33 MHz Sept. 16, 1991 25 MHz 20 MHz 16 MHz	0.8 -micron 33 MHz 25 MHz 20 MHz 16 MHz	0.8-micron 900,000 1-micron 1.2 million	4 GB	Low-cost, entry-level desktops
Intel386™ SL Processor	25 MHz 20 MHz	September 30, 1991 25 MHz Oct. 15, 1990	1-micron	855,000	4 GB	First CPU designed specifically for portables

		20 MHz				
Intel486™ DX Processor	50 MHz 33 MHz 25 MHz	June 24, 1991 50 MHz May 7, 1990 33 MHz Apr. 10, 1989 25 MHz	0.8-micron 50 MHz 1-micron 33 MHz 25 MHz	1.2 million	4 GB	Desktops and servers.
Intel386™ SX Processor	33 MHz 25 MHz 20 MHz 16 MHz	Oct. 26, 1992 33 MHz 25 MHz Jan. 25, 1989 20 MHz June 16, 1988 16 MHz	1.5- micron	275,000	16 MB	Entry-level desktop and portable computing
Intel386™ DX Processor	33 MHz 25 MHz 20 MHz 16 MHz	Apr. 10, 1989 33 MHz Apr. 4, 1988 25 MHz Feb. 16, 1987 20 MHz Oct. 17, 1985 16 MHz	1-micron 33 MHz 1.5 micron 25 MHz 20 MHz 16 MHz	275,000	4 GB	Desktops

80286	12 MHz 10 MHz 6 MHz	February 1982	1.5-micron	134,000	16 MB	Desktops (standard CPU for all IBM PCs clones at the time)
80186	12 MHz 10 MHz	1982				Used mostly in controller applications
8088	8 MHz 5 MHz	June 1979	3-micron	29,000		Desktops (standard CPU for all IBM PCs and PC clones at the time)
8086	10 MHz 8 MHz 5 MHz	June 8, 1978	3-micron	29,000	1 MB	Portable computing
8085	2 MHz	March 1976	3-micron	6,500	64 KB	Toledo scale. Computed cost from weight and price. High level of integration, operating for first time on a single 5-volt power supply (down from 12 volts).
8080	2 MHz	April 1974	6-micron	6,000	64 KB	Traffic light controller, Altair computer (first PC).
8008	200 KHz	April 1972	10-micron	3,500	16 KB	Dumb terminals, general calculators, bottling machines, data/character manipulation
4004	108 KHz	Nov. 1971	10-micron	2,300	640 Bytes	Busicom calculator, arithmetic manipulation

Selected Semiconductor Trends

Microprocessors

 State of the art technology is now 90nm with close to 1Billion transistors on a chip

DRAMS

 State of the art is now 2G bits on a chip which requires somewhere around 2.5Billion transistors


FPGA

 FPGAs currently have over 800Million transistors and are growing larger

Device count on a chip has been increasing rapidly with time, device size has been decreasing rapidly with time and speed/performance has been rapidly increasing

ITRS Technology Predictions

ITRS 2004 Supply Voltage Predictions

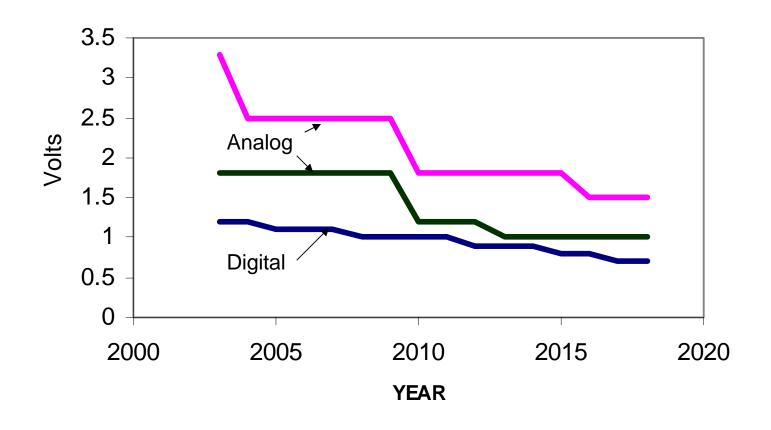

ITRS Technology Predictions

Minimum ASIC Gate Length

